

2-3 Applications
4 Specific Applications
5 Choosing a Speed Switch
6-7 Features
8 Summary of Features
9 Operating Principles
10 Building a Catalog Number
11 Catalog Number Breakdown
12-15 Selection Guide
16 Notes & Mounting Configurations
17 Accessories
18-19 Dimensional Illustrations
20-21 Dimensions
22-24 Miscellaneous Information



Series 2210



Series 2220



Series 2243



Series 2260



Series 2300



Series 2310

Speed Switches



Applications

A speed response switch indicates motion, speed and assists in the control of rotating machinery.

If you need to know whether or not a shaft is rotating, running at an acceptable speed or which way it is rotating, consider using a speed responsive switch. Such a device can remotely indicate shaft motion and direction and actuate control circuits at adjustable selected speeds. Numerous safety, sequencing, and interlocking control functions can be performed automatically with these versatile units.

Many automatic machine control actions are based on rotary shaft speed. Often a particular shaft speed and/or direction of rotation is important. For example:

1. In certain portions of a machine cycle, motion of any kind is unwanted.
2. Rotation in the wrong direction must be prevented.
3. A particular shaft speed marks the beginning of a dangerous overspeed or underspeed condition.
4. Sequential operations must take place at definite rotary speeds.

Where sensing and/or control of rotary speed is required, speed responsive switches are often the best choice. These rugged reliable components open or close electrical contacts at preset adjustable rotary speeds, in one or both directions of rotation. The contact operations can effect a variety of automatic indicating and control actions. A number of proved industrial applications for these units are listed below:

Industrial Uses

Electric Motors

- Indicate rotation and/or direction of rotation.
- Plugging and anti-plugging or preventing overspeed.
- Provide speed governing and adjustable speed action for motors.

Materials Handling Equipment

- Indicate slowdown or stoppage of rotating shafts on rotary feeders, conveyors, bucket elevators, and other material handling equipment.
- Operate emergency braking equipment on cranes, hoists, etc.

Production Equipment

- Disconnect or stop drive if speed drops below normal due to a machine jam or other type of overload.
- Energize electromagnetic clutches and brakes at preset speeds.
- Indicate number of equipment starts and stops (with counter)
- Interlock equipment actions.
- Prevent accelerations, slowdowns and reversals of mixers and centrifuges.
- Provide overspeed and under-speed protection for machines and processes.
- Shift gears automatically (machine tool transmissions).
- Remotely indicate faulty operations of any rotating parts.

General Uses

Plugging

A common use for a speed responsive switch is in plugging an electric motor. (Rapidly stopping an electrical motor by applying reverse power through a reversing contactor). Plugging increases the number of machine operations per unit of time by reducing the stopping time of the motor and the machine it drives. When used for plugging, a speed responsive switch acts with a magnetic control to allow reverse power to be applied to a rotating motor. The power is automatically removed by the switch when the motor approaches zero speed, to prevent undesirable reversing.

Anti-Plugging

Anti-plugging is used to prevent the application of reverse power to a motor operating above a preset speed. One area is in equipment with high inertia loads, where plugging from full speed in either direction could cause motor or equipment damage. A speed responsive switch used for anti-plugging will not allow a motor to be plugged until it has decelerated to a predetermined safe speed.

Material Handling Interlocking & Sequencing

Another useful application area for speed responsive switches is in bulk material handling systems. The illustration on the next page shows the various functions of speed responsive switches:

Switch "A" senses rotary feeder shaft motion. Slowing or stopping of the feeder shaft indicates a malfunction such as a jammed feeder or a plugged outlet. The speed responsive switch is set to open the drive motor circuit at some feeder shaft speed below normal.

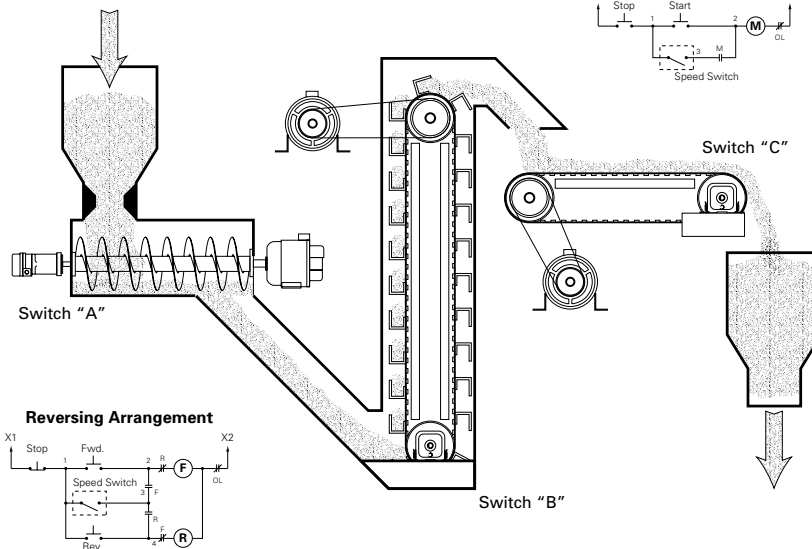


Illustration of Mechanical and Electrical Interlock uses of Speed Switches

Switch "B" monitors the speed of the elevator boot pulley, it senses a belt break or overload, or maladjustment of the boot pulley.

Switch "C" senses a conveyor breakdown or overload, or a defective adjustment of the idler pulley.

All the speed responsive switches in this application can be interlocked so that slowing or stopping of one unit in the system will automatically shut down the whole system. This will prevent the pile-up of material in or on malfunctioning units.

Other Typical Applications


Speed responsive switches can be used in many other interlocking applications. For example – in a rotary kiln

dryer, action must be taken immediately if the dryer stops turning. A speed responsive switch can sense dryer stoppage and turn off the heat. A similar application calls for a speed responsive switch to shut off the gas to a burner if a blower fails. Computers and expensive electronic equipment can also be shut down if a blower fails.

Additional Features

A useful safety feature of some speed responsive switches is a magnetic lockout coil. This prevents false starting of a motor in a plugging circuit if an operator turns the motor by hand. The coil is connected across two motor starter terminals. Operation of the speed responsive switch is prevented unless electrical power is applied to the lockout coil.

Non-Reversing Arrangement



Switch "C"

Manual and automatic reset features are also available. One application for a manual reset button is in unattended pumping stations. If a speed responsive switch shuts down a pump drive because of improper speed, a signal will be sent to a central control station. The pump drive cannot be restarted, however, until a repairman visits the remote station and operates the manual reset button, which forces repair of the fault causing the shutdown.

Specific Applications

Series 2200

Machine Tools — Euclid Type PR Series can be used to increase production as a zero-speed plugging switch with normally open contacts incorporated with a magnetic reverse panel to bring AC motors to a quick stop.

Motion Interlocking — such as on conveyor systems, where a centrifugal switch is driven by the main conveyor at a location near the junction with a feeder conveyor. The normally open centrifugal switch contacts are connected in series with the control circuits of the magnetic controllers for the motors driving the feeder conveyors. If the main conveyor accidentally stops, the centrifugal switch driven by that conveyor will automatically stop the motors driving the feeder conveyors, preventing material from being piled up on the stalled conveyor by the feeder conveyors.

Series 2210

Euclid Type C switches provide overspeed & underspeed protection and precise speed sensing with high repetitive accuracy to indicate slipping or broken conveyor belts, preventing material pileup; prevent overspeed or underspeed of motors, generators, fans & pumps; control starting of diesel engines, prevent damage to rotating industrial machinery, when speeds increase or decrease from safe values; for plugging applications to assure quick & safe stops; sequential control of functions at specific speeds.

Series 2220

With Production Equipment — Euclid Type F switches may be incorporated to stop motor drives in case of machine jams or overloads; energize electromagnetic clutches and brakes; indicate (with a counter) equipment starts and stops; prevent slowdowns and reversals of mixers and centrifuges; provide reversal and unwanted motion protection for compressors, pumps, electric motors, test equipment; automatically shift gears on machine tools and power transmissions; indicate motion or broken shaft for stamping presses.

Series 2243

Conveyor Manufacturers — use it to indicate jammed screw conveyors; slipping or broken belts; very low speed sequencing.

Machine Manufacturers — utilize the Euclid Type D switch in determining time in seconds or even fractions of a second to stop motion of a press or machine for protection to personnel or indexing machines so that proper and exact holes are punched accurately. Sequential control of functions at specific speeds is a natural application; prevent damage to rotating industrial machinery when speed increases or decreases from safe standards; shift linkages on engine lathes.

Series 2260

On Production Equipment — The Euclid Type E Switch can be used to stop drive equipment in cases of jam or motor drive slowdowns due to severe overload condition; can energize or control electromagnetic brake circuitry to provide consistently accurate stops; prevent inadvertent drive reversals of mixers, pumps, and winches; provide over or underspeed protection and/or indication; indicate and prevent improper sequence of gear or speed changes; can indicate "lost rotary cam limit switch" speed on stamping or welding presses.

Series 2310

Numerous production control and related applications include underspeed as with chain, belt, screw, and related conveyors; also zero-speed sensing for web, belt or coupling breakage, etc. Specific production uses include start-up of motors for mixing units, rotary kilns, blower fans, mine pumps, sequencing conveyors, etc.

The 3-wire Low Voltage Sensors are ideally suited to installations with hazardous atmospheres as the 24V DC power level and non-arcing plastic housing. They can be used in intrinsically safe installations when applied with appropriate zener barrier protection.

Choosing a Speed Switch

The first step in selecting a speed responsive switch is to determine what it must do electrically in response to shaft rotation. Points that should be resolved include:


1. What contact configurations (SPST, SPDT, etc.) are required?
2. Are snap-action or butt-type contacts needed? Snap-acting contacts are more sensitive when speed changes in the control zone are slow. Butt-type contacts are satisfactory for rapid speed changing conditions.
3. Is direction sensing required? This suggests the use of a speed responsive switch that can detect direction of operation, and requires no change-over for direction of rotation.
4. Is the contact speed adjustment range satisfactory?
5. Is the maximum running speed rating of the switch compatible with the application?
6. Will contact rating (current, voltage, AC or DC, type of load, etc.) ensure long switch life?
7. Have special electrical features (magnetic lockout coil, manual or automatic reset, etc.) been specified?
8. The operating environment should be checked and a suitable enclosure specified for the switch.
9. Operating temperature ratings should be considered in selecting a speed responsive switch.
10. Specify surface (standard) or flange mounting enclosures.
11. Where a separate switch is to be direct-driven by a motor or a machine shaft, the use of a flexible coupling is recommended between the driving and driven shafts. End thrust should never be imposed on a speed responsive switch and speed increasers are available to change the operating range of a switch. Direct rigid connections and chain drives are not recommended.









Directional vs. Non-Directional Switches

Directional switches are units that sense the direction in which the shaft is rotating by means of operating only one of two isolated circuits for a given direction of shaft rotation.

Non-directional switches do not sense the direction their shaft is rotating. The same circuits operate in either direction of shaft rotation.


The table at the right shows which switches are directional and non-directional.



Directional Units	
Field Setting  Series 2220	Factory Setting (recommended)  Series 2200 PR-026, PR-029 & NPR-029B
 Series 2260 2260-012, -022 & -032	
Non-Directional Units	
 Series 2200 Except PR-026, PR-029 & NPR-029B	 Series 2260 2260-011, -021 & -031
 Series 2210	 Series 2310
 Series 2243	

Directional vs. Non-Directional Identification Table


Features



Series 2200

Euclid Type PR Series are pilot circuit switches with contacts that are opened or closed by means of centrifugal force. The contacts are therefore responsive to changes in speed so that these switches can be used for plugging, overspeed or underspeed protection, non-plugging, and for motion interlocking.

- MSHA Approved XB, XC, XD, & XE Series
- Mill Construction, Cast Iron Frame and End Plates
- NEMA Style Enclosures for Indoor, Outdoor & Hazardous Applications
- Directional or Non-Directional Contacts
- Silver-To-Silver Contacts
- Easy Accessibility to Contacts and Flyweight Assy
- Permanently Lubricated Precision Bearings
- Surface or Flange Mounting
- $\frac{5}{8}$ " \varnothing Stainless Steel Shaft
- Optional Rear Shaft Extension, Manual Reset Contacts
- AC and DC, Slow Break-Butt Type or Snap-Action Precision Switch




Series 2200 Connection Panel

Series 2210

Type C Speed Responsive switches assure maximum protection of material handling systems and rotating equipment. They provide overspeed and underspeed protection with precise speed sensing. These switches have excellent repetitive accuracy and are basically unaffected by temperature variations.

- NEMA Type Enclosures for Indoor, Outdoor & Hazardous Environment
- Rugged Construction
- Contacts Easily Adjustable While Running
- High Speed Operation to 4700 RPM*
- Low Speed Operation from 10 RPM*
- Snap-Action Contacts or Pneumatic Air Valve
- Oversize Low Friction Bearings
- Surface or Flange Mounting
- $\frac{5}{8}$ " \varnothing Input Stainless Steel Shaft

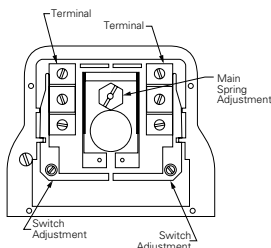


Series 2210 Connection Panel

Series 2220

The Euclid Type F speed responsive switch is low speed, pilot circuit device designed to sense rotation of production or materials handling equipment and provide an electrical interlocking signal with other mechanical or electrical devices. The Type F switch as a stop motion indicator assures safe and proper sequential operation of rotating equipment.

- NEMA Type Enclosures for Indoor, Outdoor and Hazardous Applications
- Rugged Construction
- Contacts Easily Adjustable While Running
- Low Speed Operation from 0.8 RPM*
- Snap-Action Contacts, SPDT Operation in Either Direction
- Oversize Permanently Lubricated Bearings
- Surface or Flange Mounting
- $\frac{5}{8}$ " \varnothing Input Shaft

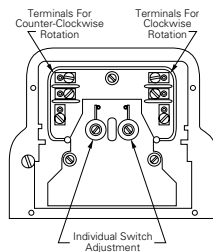


Series 2220 Connection Panel

Series 2243

Euclid Type D Speed Responsive Switches are highly precise, non-directional, solid state, low speed responsive devices for industrial applications. The unique light chopping network "digitally controlled" output relay can easily be adjusted to open or close an electric circuit at speeds as low as .6 RPM. Type D switches provide precise speed sensing and sequential control with high repetitive accuracy.

- Precise Speed Sensing
- Low Speed Operation from 0.6 RPM*
- High Running Speed to 3600 RPM
- NEMA & CEMA Type 4 Encl.
- Silicon Solid State Components, Integrated Circuits, Transient Voltage Protection
- Digital Controlled Output Relay
- LED Light Chopping Disc and Cell Assembly
- Oversize Bearing, Rugged Enclosure, Double Shaft Seals with Lubrication Fitting
- Adjustable Differential

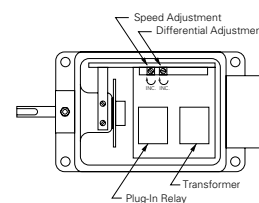


Series 2243 Connection Panel

Series 2260

The Bulletin 2260 Type E Speed Responsive Switch is a medium speed pilot circuit device designed to precisely and rapidly sense rotational speed of production and materials handling equipment. The sensor provides an electrical interlocking signal to associated electromechanical devices. The use of the Type E Switch as a "Stop-Motion" indicator can assist in assuring safe and consistently proper sequential operation of rotating equipment.

- Medium Actuation Speed Range 3 – 300 RPM
- Output Actuation Speed Adjustable While In Motion
- NEMA 13 Enclosures, Dust-tight and Oil-tight Indoor
- Relay Contact Output - SPDT
- Oversize Bearings and Shaft Support
- Surface/Flange Mounting
- Non-directional or Directional Sensing
- $\frac{5}{8}$ " \varnothing Stainless Steel Shaft

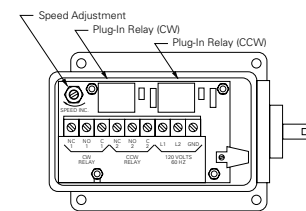

Series 2260 Connection Panel

Series 2310

The 2310 Non-Contact Speed Responsive Switch is a self-contained solid state device capable of sensing the presence of metal without physical contact. This high-density tubular package senses metal targets in a nominal 10 mm (0.4") sensing distance from the sensing head for targets of a typical size, 30 mm (1.20") square by 1.5mm (0.06") thick.

- Solid State Speed-Sensing Device
- Self-Contained Control Adjustments and Diagnostics
- Ease of Installation
- Maintenance Free
- Automatic Reset Each Cycle
- High Impact Housing
- Available in models for Low DC Voltage Three Wire Applications or AC Voltage Two Wire in Line Applications

* Select specific model to match speed requirements.


* Select specific model to match speed requirements.

Summary of Features

The table below covers the broad range of features available in each series of Hubbell's speed switches. Use this guide to quickly locate the general requirements of your application and then select your speed switch from the detailed switch selection tables in the back of this digest.

	Series 2200	Series 2210	Series 2220	Series 2243	Series 2260	Series 2310
Type of Mechanism	Mechanical Centrifugal Force	Mechanical Centrifugal Force	Mechanical Fluid/Eddy Current	Electronic	Electronic	Non-Contact Sensing
Operating Range (ascending trip)	80 – 2550 RPM	10 – 3700 RPM♦	1 – 90 RPM♦	.6 – 300 RPM	3 – 300 RPM	6 – 150 RPM or 150 – 3600 RPM
Operating Range (descending trip)	65 – 2450 RPM	9 – 3500 RPM♦	1 – 59 RPM♦	.57 – 240 RPM	2.25 – 225 RPM	6 – 150 RPM or 150 – 3600 RPM
Max Running Speed	3600 RPM	5000 RPM♦	2000 RPM♦	3600 RPM	3600 RPM	Max. Sensing Distance – 12mm
Adjustment	Field Adjustable <i>(Factory Set Recommended)</i>	Field Adjustable	Field Adjustable	Field Adjustable	Field Adjustable	Field Adjustable
Repeatability	±5%	±5%	±20% <i>(at constant ambient)</i>	±2%	±2%	±6%
Rotation Sensing	Directional & Non-Directional	Non-Directional	Directional	Non-Directional	Directional & Non-Directional	Non-Directional
Voltage	AC or DC	AC or DC	AC only	AC only	AC only	AC or DC
Current Rating (continuous)	15 amps (max.) @ 120/240V AC 10 amps (max.) @ 125/240V DC	10 amps (max.) @ 120/240V AC @ 125/240V DC	3 amps (max.) @ 120V AC	5 amps (max.) @ 120V AC	7 amps (max.) @ 120V AC	200 mA (max.) @ 120V AC
Interrupting Ratings	3 amps 120V AC @ 35% P.F.	3 amps 120V AC @ 35% P.F.	1.5 amps 120V AC @ 35% P.F.	2 amps 120V AC @ 35% P.F.	2.5 amps 120V AC @ 40% P.F.	n/a
Input Voltage	120/240/480V AC or 125/240V DC	120/240/480V AC or 125/240V DC	120/240V AC	115V AC ±10% 50/60 Hz 15 Watts	115V AC ±10% 50/60 Hz 4 Watts	10 – 30V DC ±10% or 102V – 132V AC 50/60 Hz 300 mA (max.)
Ambient Temperature	-60°F to +250°F (-50°C to +121°C)	-60°F to +250°F (-50°C to +121°C)	-60°F to +250°F (-50°C to +121°C)	32°F to +158°F (0°C to +70°C)	0°F to +158°F (-18°C to +70°C)	-4°F to +158°F (-20°C to +70°C)
Enclosure	Cast Iron End Plates & Frame with Steel Wrap Cover	Fiberglass Reinforced Polyester Resin and/or Cast Aluminum	Fiberglass Reinforced Polyester Resin and/or Cast Aluminum	Cast Aluminum	Cast and Drawn Aluminum	Glass Filled Polyester or Nickel Plated Brass
NEMA Ratings	3R, 4, 7, 9 & 10	4, 7, 9, 10 & 13	4, 7, 9 & 13	4	13	4X & 13
Mounting Configurations	Surface or Flange	Surface or Flange Single/Double Gear Clusters	Surface or Flange Single/Double Gear Clusters	Surface or Flange	Surface	Surface Observed Free Zone
Max Overhung Load	40 lbs @ 3600 RPM	34 lbs @ 3600 RPM	20 lbs @ 3600 RPM	34 lbs @ 3600 RPM	20 lbs @ 3600 RPM	n/a
Max End Thrust	20 lbs @ 3600 RPM	10 lbs @ 3600 RPM	10 lbs @ 3600 RPM	10 lbs @ 3600 RPM	20 lbs @ 3600 RPM	n/a

♦ Internal gear clusters available to reduce standard operating/running speed range.

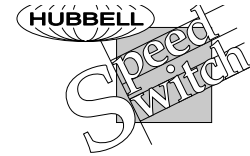

Operating Principles

A speed-responsive switch consists of three major elements: an input member, a speed sensor and an output member.

The input member is a shaft. It is rotated by the motor or machine being controlled through a flexible shaft, a chain drive, a belt drive, or a gear drive.

Speed sensing can be accomplished in several ways. Common methods employ centrifugal force, fluid/eddy current actuation, and electronic (solid state) units.

The output member of a speed responsive switch includes one or more electrical contacts or pneumatic air valves that either open or close as directed by the speed sensor. Selection of the output member depends upon the application. For example, a unit used to detect overspeed needs only a pair of contacts that will either close or open when a particular speed has been attained. On the other hand, a speed switch that controls starting, overspeed, and underspeed of a machine or process needs several contacts that operate at different speeds.

Standard speed responsive switches are available with up to two sets of contacts. If more control functions are required, multiple units can be operated from a single shaft or from the shafts of several machine sections, or control relays can be employed to provide the needed circuits.

An interesting variation in type of output member is found in our centrifugal unit that operates an air pilot valve instead of an electrical switch. This unit was developed at the request of a gas engine manufacturer so that he could eliminate the use of an electrical system in a remote, natural gas pumping station. The air pilot valve controls a large valve supplying gas to the engine. It provides underspeed or overspeed protection for the engine. Valve operation is a function of both the switch speed and the pressure in the pneumatic control system.

Eddy Current Motion Detection

The centrifugal method of measuring speed has been used for over 50 years in the industrial marketplace and utilizes a simple physical process. The Series 2220 switch on the other hand uses a technology not quite so old – fluid/eddy current motion detection. Inside the driven end of the switch is a hermetically-sealed rotating chamber which contains silicone fluid. Inside this chamber, a concentric cylinder suspended on precision ball bearings is turned by the viscous drag of the silicon fluid.

The torque of the internal cylinder is transmitted through the walls of the chamber by powerful permanent magnets which operate the snap-action contacts in the contact compartment.

Electronic Motion Detection

Hubbell offers three electronic models – Series 2243 and 2260 use a light chopping disc that is mounted directly on the input shaft. When the shaft is rotated, the disc segments interrupt an IR light beam between a solid state LED light source and a light sensitive cell. A specific number of light pulses are produced for each revolution of the shaft. The pulses are counted by the digital circuitry, actuating an output relay at a set point.

The latest Hubbell speed switch, Series 2310, utilizes proximity sensing technology. Proximity sensing uses a non-contact sensing device that produces an output signal whenever a metallic object is detected and responds to the rate of that detection. Due to this, no input member, shaft extension or physical connection to the rotating equipment is required. By the use of this non-contact sensing method, no pressure of any sort needs to be exerted on the scanned material. Magnetization of the scanned material does not take place therefore iron filings or magnetized particles will not collect on the scanned material or on the proximity sensor.

Calculating Response Time for Series 2243/2260

$$\text{Ascending Response Time (sec.)} = \frac{2}{\text{Input Shaft Speed (rpm)}} + C$$

$$C = .015 \text{ (Series 2243)} \ \& \ .013 \text{ (Series 2260)}$$

$$\text{Descending Response Time (sec.)} = \frac{1}{\text{Descending Set Point (rpm)}} + C$$

$$C = .010 \text{ (Series 2243)} \ \& \ .006 \text{ (Series 2260)}$$

Building a Catalog Number

One of the most difficult procedures for any complex and thorough product line such as Hubbell's speed switches, is determining the catalog number for the switch you need for your application. We have been able to simplify this.

Catalog numbers for mechanical speed switches (Series 2200, 2210, 2220) are comprised of three basic parts (shown on adjacent page) – the type of switch, the enclosure or NEMA rating required for the switch and the options available. The catalog number for the switch is made up of a variety of letters and numbers. They are usually dictated by the application the switch will be used for.

Catalog numbers for electronic speed switches (Series 2243, 2260, 2310) are much simpler due to their single unit/single function construction.

How to Build the Catalog Number

Series 2200*

Determine the type of contacts you want for your speed switch. The table shows the type of contacts available. Under each group of contact types, the switches are listed by the maximum running speed. Once determining the correct area of the table for the maximum running speed, select the switch with the contact adjustment range required. The catalog number is shown to the right.

Next determine what type of housing your application requires and add the appropriate suffix. The standard enclosure is NEMA 1 gasketed and several options are available. Add the appropriate suffix for these options to complete the catalog number.

For speed switch pricing, see the companion [Speed Switch Price List](#).

Series 2210/2220*

Determine the type of contacts you want for your speed switch. The table shows the type of contacts available. Under each group of contact types, the switches are listed by the maximum running speed. Once determining the correct area of the table for the maximum running speed, select the switch with the contact adjustment range required. The catalog number is shown to the right.

Next determine what type of housing your application requires and add the appropriate suffix to the catalog number.

To determine the options available read further across the column. If you require flange mounting or manual reset button(s) and those options are available replace the "x" in the catalog number with the appropriate letter. You now have a complete catalog number.

If you do not require any of these options, simply remove the "x" from the completed catalog number, leaving the enclosure NEMA rating.

For speed switch pricing, see the companion [Speed Switch Price List](#).

Series 2243*

Determine whether you need over-speed or under-speed protection, the shaft diameter, and your rpm requirements. Using the table on page 15, you can then select the proper catalog number.

For speed switch pricing, see the companion [Speed Switch Price List](#).

Series 2260*

Determine whether you need directional or non-directional contacts, type of mounting, and your rpm requirements. Using the table on page 15, you can then locate the proper catalog number.

For speed switch pricing, see the companion [Speed Switch Price List](#).

Series 2310*

Determine whether you need normally open or closed contacts, whether your electrical circuit is AC or DC, and if DC whether your electrical design requires load sinking (NPN) or load sourcing (PNP); the housing material preferred, and your rpm requirements. Using the table on page 15, you can then select the proper catalog number.


For speed switch pricing, see the companion [Speed Switch Price List](#).

Ordering Example

You need a speed responsive switch for overspeed detection. The switch needs to operate at 2100 rpm on increasing speed, be flange mounted to the motor with a manual reset feature. One NC contact for a 110V AC pilot circuit is required and the contact needs to operate in either direction.

The switch you select is the Series 2210. The catalog number for the switch to meet these requirements is built as shown in the four steps on the next page.

* Refer to appropriate selection guide.

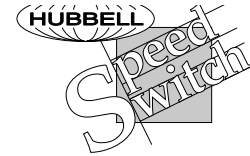

Catalog Number Breakdown

The catalog numbers shown below are for example purposes.


Type of Switch			NEMA Rating
PR-025-	1	1	F
Switch Type PR-025 Non-directional butt type contacts SPST-NO PRE-025 Non-directional butt type anti-bounce contacts SPST-NO PR-026 Directional butt type contacts SPST-NO PRE-026 Directional butt type anti-bounce contacts SPST-NO PR-029 Directional butt type contacts SPST-NO This unit has a safety lockout coil. Specify coil voltage when ordering. NPR-029 Direction butt type contacts SPDT-NC PRS-025 Non-directional snap action SPDT-NO/NC AC contacts PRD-025 Non-directional snap action SPDT-NO/NC DC contacts PRS-031 Non-directional snap action SPDT-2 NO/2 NC AC contacts PRD-031 Non-directional snap action SPDT-2 NO/2 NC DC contacts PRS-038M Non-directional snap action SPDT-2 NO/2 NC AC manually reset contacts	Flyweight Type 0 – Extra Heavy 1 – Heavy 2 – Medium 3 – Medium Light 4 – Light 5 – Extra Light	Spring Type 1 – Light 2 – Heavy	Enclosures No-Suffix NEMA 1 Gasketed (standard) E Rear shaft extension F Flange mounting W/P Weather proof - NEMA 3R WT Water tight - NEMA 4 XA NEMA 7 Class 1-Groups D, Div. 1 or 2 XBP NEMA 9 Class 2-Groups E, F, or G, Div. 1 or 2 XB/C/XD/XE NEMA 10 Explosion Proof MSHA approved

Type of Switch				NEMA Rating	Options	
2220-	1	1	1	CC	13	S
Switch Type 2210 - Centrifugal action flyweight type 2220 - Fluid/Eddy Current type	Spring Type 1 - Heavy 2 - Medium 3 - Light 4 - Ex. Light 5 - Wide Range (Heavy) 6 - Wide Range (Light)	Contact Type - 2210 2 - Snap Action, AC (Non-directional) 3 - Snap Action, DC (Non-directional)	Contact Type - 2220 1 - Directional 2 - CCW Activation Only 3 - CW Activation Only	Enclosure NEMA 4 - Water Tight 7 - Explosion-proof Class 1 Groups C or D 9 - Explosion-proof Class 2 Groups E, F or G, Div. 1 or 2 13 - Industrial use (standard)	Optional Features F - Flange mounting (via NEMA 4) S - Single speed increaser (2.94 to 1) SS - Double speed increaser (8.64 to 1) M - 1 manual reset (AC only) MM - 2 manual reset (AC only)	
Flyweight type - 2210 1 - Heavy 2 - Medium 3 - Light 4 - Extra light	Rotor Code - 2220 1 - Standard 2 - Press application	<i>Viewed from shaft end of switch</i>		<i>This section of the part number is determined by the user's speed selection and is only provided for informational purposes.</i>		

Ordering Example

- Using the table we identify a **2210-312CCx** meets our requirements for speed range, contacts and directional requirements. (See Page 13)
- The NEMA enclosure required is just a standard configuration - NEMA 13. Replacing the "x" this gives us the following catalog number:
2210-312CC13
- The options we required were flange mounting and manual reset which are both available.
2210-312CC13 F M
Flange Mounted Manual Reset
- Complete catalog number - **2210-312CC13FM**
Refer to Price List 2200 for price of speed switch. Consult with factory if catalog number does not appear in the price list.

Selection Guides



Type 2200

Application	Maximum Running Speed	Contact Adjustment Range ¹		Contacts ²		Catalog Number
		Min. RPM Asc.	Max. RPM Desc.	Left Hand	Right Hand	
Snap Action – Precision Switch Type Non-Directional Contacts AC Voltage						
Overspeed or underspeed protection	1800	80	65	170	155	2200-PRS-025-01
	2000	105	85	200	170	2200-PRS-025-11
	3600	140	105	320	280	2200-PRS-025-21
	3600	230	190	680	620	2200-PRS-025-22
	3600	750	650	2550	2450	2200-PRS-025-42
Snap Action – Precision Switch Type Non-Directional Contacts DC Voltage						
Overspeed or underspeed protection	1800	90	65	180	140	2200-PRD-025-01
	2000	115	70	190	140	2200-PRD-025-11
	3600	180	100	290	220	2200-PRD-025-21
	3600	270	160	750	630	2200-PRD-025-22
	3600	920	650	2600	2100	2200-PRD-025-42
Slow Break – Butt Type – Non-Directional Contacts AC or DC Voltage						
Non-reversing plugging or underspeed protection	2000	135	125	510	470	2200-PR-025-11
	3600	235	215	735	675	2200-PR-025-21
	3600	300	275	1630	1550	2200-PR-025-22
	3600	830	770	2530	2300	2200-PR-025-42
Slow Break – Butt Type – Directional Contacts AC or DC Voltage						
Reverse plugging on drives that cannot be turned by hand to cause an accidental start	2000	135	125	510	470	2200-PR-026-11
	3600	235	215	735	675	2200-PR-026-21
	3600	300	275	1630	1550	2200-PR-026-22
	3600	830	770	2530	2300	2200-PR-026-42
Slow Break – Butt Type – Directional Contacts AC or DC Voltage With Lock-Out Relay⁸						
Reverse plugging on drives that can be turned by hand. Accidental start prevented.	2000	160	145	345	315	2200-PR-029-11
	3600	240	220	1030	945	2200-PR-029-21
	3600	365	340	1960	1780	2200-PR-029-22
Slow Break – Butt Type – Directional Contacts AC or DC Voltage						
Anti-plugging – to prevent plugging stops that would damage gears, etc.	2000	135	100	—	—	2200-NPR-029B-11

Optional Feature	Description
WP	Weatherproof – NEMA 3R
WT	Watertight – NEMA 4
XA	NEMA 7 Explosion Proof Class 1, Group D
XBP	NEMA 9 Explosion Proof Class 2, Group E, F, or G
XBJ/CX/DXE	NEMA 10 Explosion Proof MSHA Approved
F	Flange Mounting (NEMA 1 switches only)
E	Rear Shaft Extension .3939"ø x 1.25" (NEMA 1 switches only)

When selecting options for the Series 2200, first determine which switch your application requires from the table above. Then from the table left determine which type of housing you require. If the housing you selected is NEMA 1, then determine if the additional options of flange mounting and rear shaft extension are necessary.

See page 16 for all footnotes and general notes. Contact Factory For Optional Features Not Shown.

Type 2210


Application	Maximum Running Speed	Contact Adjustment Range ¹		Contacts ²		Catalog Number	NEMA Rating	Options	Notes
		Min. RPM Asc.	Max. RPM Desc.	Left Hand	Right Hand				
Snap-Action – Precision Switch Type Non-Directional Contacts – AC Voltage									
Overspeed or underspeed protection	208	10	9	49	47	2210-142CCxSS	4,7,9,13	M,MM	9,10
	208	14	10	68	64	2210-132CCxSS	4,7,9,13	M,MM	9,10
	463	15	11	87	80	2210-232CCxSS	4,7,9,13	M,MM	9,10
	463	22	19	150	133	2210-222CCxSS	4,7,9,13	M,MM	9,10
	612	31	26	145	139	2210-142CCxS	4,7,9,10,13	F,M,MM	9,10,11
	612	41	29	201	187	2210-132CCxS	4,7,9,10,13	F,M,MM	9,10,11
	1361	44	32	255	235	2210-232CCxS	4,7,9,10,13	F,M,MM	9,10,11
	1361	65	54	442	391	2210-222CCxS	4,7,9,10,13	F,M,MM	9,10,11
	1800	90	75	425	410	2210-142CCx	4,7,9,10,13	F,M,MM	9,11
	1800	120	85	590	550	2210-132CCx	4,7,9,10,13	F,M,MM	9,11
4000	130	95	750	690	2210-232CCx	4,7,9,10,13	F,M,MM	9,11	
4000	190	160	1300	1150	2210-222CCx	4,7,9,10,13	F,M,MM	9,11	
5000	470	315	3700	3500	2210-312CCx	4,7,9,10,13	F,M,MM	9,11	
Snap-Action – Precision Switch Type Non-Directional Contacts – DC Voltage									
Overspeed or underspeed protection	208	19	13	81	67	2210-133CCxSS	4,7,9,13		9,10
	463	26	16	87	71	2210-233CCxSS	4,7,9,13		9,10
	463	29	20	156	130	2210-223CCxSS	4,7,9,13		9,10
	612	56	39	238	196	2210-133CCxS	4,7,9,10,13	F	9,10
	1361	77	46	255	207	2210-233CCxS	4,7,9,10,13	F	9,10
	1361	85	60	459	381	2210-223CCxS	4,7,9,10,13	F	9,10
	1800	165	115	700	575	2210-133CCx	4,7,9,10,13	F	9
	4000	225	135	750	610	2210-233CCx	4,7,9,10,13	F	9
	4000	250	175	1350	1120	2210-223CCx	4,7,9,10,13	F	9
	5000	520	390	3600	3250	2210-313CCx	4,7,9,10,13	F	9

Note: Replace "X" in catalog number with NEMA enclosure type (4, 7, 9, 10 or 13).

Optional Feature	Description
F	Flange mounting
M	1 manual reset contact (AC only)
MM	2 manual reset contacts (AC only)

When selecting options for the Series 2210 switches, first determine which switch your application requires from the table on this page. Then determine which type housing and mounting configuration you require. The only mounting configurations available for most switches are – "surface mounting" or "flange mounting". The standard configuration is "surface mounting". If the switch you selected has AC SPST contacts, you can additionally select whether you want single or double manual reset buttons. **NEMA 4 Flange mounting is not available.**

Selection Guides



Type 2220

Application	Maximum Running Speed	Contact Adjustment Range ¹		Contacts ²		Catalog Number	NEMA Rating	Options	Notes
		Min. RPM Asc.	Max. RPM Desc.	Left Hand	Right Hand				
Snap-Action – Precision Switch Type – Directional Contacts – AC Voltage									
	20	1	1	8	5	2220-221CCxSS	4,7,9,13		4
	60	2	1	24	14	2220-221CCxS	4,7,9,13	F	4,10
	175	7	4	70	42	2220-221CCx	4,7,9,13	F	4,9
Motion/Loss of Motion protection	231	1	1	3	2	2220-111CCxSS	4,7,9,13		
	231	2	1	6	3	2220-121CCxSS	4,7,9,13		
	680	2	1	8	5	2220-111CCxS	4,7,9,13	F	10
	680	5	3	17	10	2220-121CCxS	4,7,9,13	F	10
	2000	7	4	23	14	2220-111CCx	4,7,9,13	F	9
	2000	15	9	50	30	2220-121CCx	4,7,9,13	F	9
Snap-Action – Precision Switch Type – Operate CCW³ Shaft Rotation – AC Voltage									
	20	2	1	10	7	2220-222CCxSS	4,7,9,13		4
	60	4	2	30	20	2220-222CCxS	4,7,9,13	F	4,10
	175	13	7	87	59	2220-222CCx	4,7,9,13	F	4,9
Motion/Loss of Motion protection	231	2	1	5	3	2220-112CCxSS	4,7,9,13		
	231	3	1	10	6	2220-122CCxSS	4,7,9,13		
	680	4	2	14	9	2220-112CCxS	4,7,9,13	F	10
	680	7	4	31	18	2220-122CCxS	4,7,9,13	F	10
	2000	13	7	42	25	2220-112CCx	4,7,9,13	F	9
	2000	22	11	90	54	2220-122CCx	4,7,9,13	F	9
Snap-Action – Precision Switch Type – Operate CW³ Shaft Rotation – AC Voltage									
	20	2	1	10	7	2220-223CCxSS	4,7,9,13		4
	60	4	2	30	20	2220-223CCxS	4,7,9,13	F	4,10
	175	13	7	87	59	2220-223CCx	4,7,9,13	F	4,9
Motion/Loss of Motion protection	231	2	1	5	3	2220-113CCxSS	4,7,9,13		
	231	3	1	10	6	2220-123CCxSS	4,7,9,13		
	680	4	2	14	9	2220-113CCxS	4,7,9,13	F	10
	680	7	4	31	18	2220-123CCxS	4,7,9,13	F	10
	2000	13	7	42	25	2220-113CCx	4,7,9,13	F	9
	2000	22	11	90	54	2220-123CCx	4,7,9,13	F	9

Optional Feature	Description
F	Flange mounting

When selecting options for the Series 2220 switches, first determine which switch your application requires from the table on this page. Then determine which type housing and mounting configuration you require. The only mounting configurations available for most switches are – “surface mounting” or “flange mounting”. The standard configuration is “surface mounting”.

See page 16 for all footnotes and general notes. Contact Factory For Optional Features Not Shown.

Series 2243

$\frac{3}{8}$ " Shaft Catalog Number	$\frac{5}{8}$ " Shaft Catalog Number	Maximum Running Speed	Contact Adjustment Range ¹	
			Min RPM	Max RPM
Under Speed Detection⁵ – Non-Directional Contacts				
			Desc. Trip	Asc. Speed Adj. Range
			Desc. Trip	Asc. Speed Adj. Range
2243-201	2243-301	3600	0.57	0.60–0.71
2243-202	2243-302	3600	3.8	4.0–4.7
2243-203	2243-303	3600	14.3	15.0–17.8
2243-204	2243-304	3600	47.5	50.0–59.4
Over Speed Detection⁶ – Non-Directional Contacts				
			Asc. Trip	Desc. Speed Adj. Range
			Asc. Trip	Desc. Speed Adj. Range
2243-211	2243-311	3600	0.6	0.48–0.57
2243-212	2243-312	3600	4.0	3.20–3.80
2243-213	2243-313	3600	15.0	12.0–14.3
2243-214	2243-314	3600	50.0	40.0–47.5

Series 2260


Catalog Number	Maximum Running Speed	Contact Adjustment Range ¹		Min Trip Speed Asc.	Max Trip Speed Desc.	Mounting
Non-Directional Contacts						
2260-021	3600	3.0	2.25	300	225	Surface/Flange
2260-031	3600	3.0	2.25	300	225	Surface/Flange ⁷
Directional Contacts						
2260-022	3600	3.0	2.25	300	225	Surface/Flange
2260-032	3600	3.0	2.25	300	225	Surface/Flange ⁷

Series 2310

DC-NPN Part Number	DC-PNP Part Number	AC Part Number	Contact	Speed Range	Housing
48952-101	48953-101	48910-101	NO	6 – 150	Plastic
48952-102	48953-102	—	NC	6 – 150	Plastic
48952-103	48953-103	48910-102	NO	150 – 3600	Plastic
48952-104	48953-104	—	NC	150 – 3600	Plastic
48952-151	48953-151	48910-151	NO	6 – 150	Nickel Plated
48952-152	48953-152	—	NC	6 – 150	Nickel Plated
48952-153	48953-153	48910-152	NO	150 – 3600	Nickel Plated
48952-154	48953-154	—	NC	150 – 3600	Nickel Plated

See page 16 for all footnotes and general notes. Contact Factory For Optional Features Not Shown.

Dimensional Illustrations



See page 20 & 21 for dimensions.

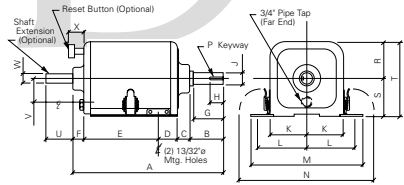


Illustration #1
Surface Mounting Enclosure – 2200
Approx. Weight 12 lbs.
NEMA 1 Gasketed or NEMA 3R

Illustration #2
Surface Mounting Enclosure – 2200
Approx. Weight 26 lbs.
NEMA 4, 7 or 9

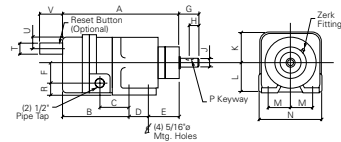
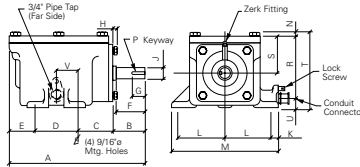


Illustration #3
Surface Mounting Enclosure – 2210/2200
Approx. Weight 4 lbs.
NEMA 4 or 13

Illustration #4
Surface Mounting Enclosure – 2210/2220
Approx. Weight 4.5 lbs.
NEMA 4 or 13

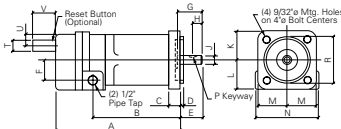
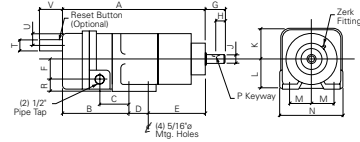


Illustration #5
Flange Mounting Enclosure – 2210/2220
Approx. Weight 5 lbs.
NEMA 13

Illustration #6
Surface Mounting Enclosure – 2210/2220
Approx. Weight 9.5 lbs.
NEMA 7, 9 or 10

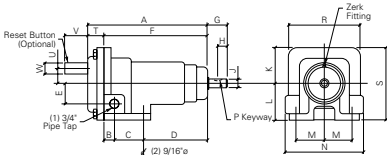
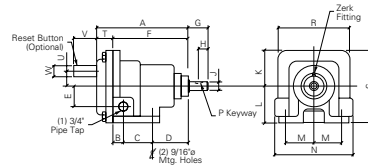


Illustration #7
Surface Mounting Enclosure – 2210/2220
Approx. Weight 11.5 lbs.
NEMA 7 or 9

Illustration #8
Surface Mounting Enclosure – 2243
Approx. Weight 5 lbs.
NEMA 4

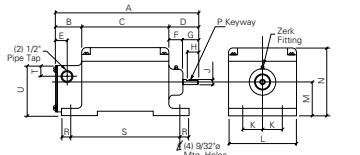


Illustration #9
Surface Mounting Enclosure – 2260
Approx. Weight 4 lbs.
NEMA 13

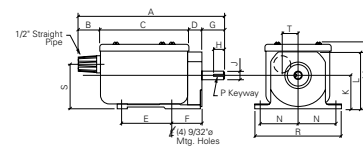


Illustration #11
Flange Mounting Enclosure – 2210/2220
Approx. Weight 11.5 lbs.
NEMA 7 or 9

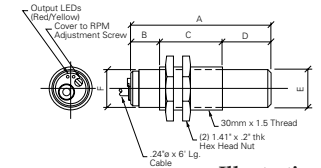
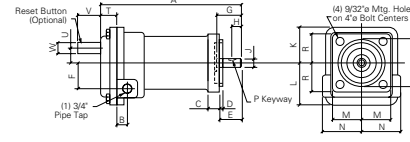


Illustration #10
Surface Mounting Enclosure – 2310
Approx. Weight 1 lbs.
NEMA 4X or 13


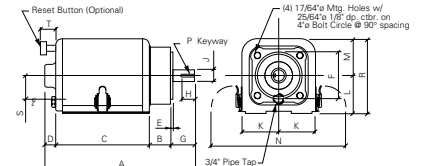


Illustration #12
Flange Mounting Enclosure – 2200
Approx. Weight 13.5 lbs.
NEMA 1 Gasketed

Illustration #13
Surface Mounting Enclosure – 2210/2220
Approx. Weight 5.5 lbs.
NEMA 4 or 13

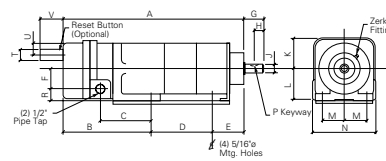


Notes:
For pages 18 – 21

- All dimensions are in inches unless noted otherwise. Available options titles are "Res But" – Reset Button, "Sft Ext" – Shaft Extension, "Zrk Fit" – Zerk Fitting and "Cond Con" – Conduit Connection and Lock Screw.
- The notes listed below are for size of conduit connection supplied on speed switches and appear on the tables on pages 20 & 21.

- 1-1/8" x 12NF Thread 1/2" Ent.
- 1" x 14NF Thread 7/16" Ent.
- 1-1/8" x 12NF Thread 5/8" Ent.
- 1-1/8" x 12NF Thread 3/4" Ent.

Dimensions

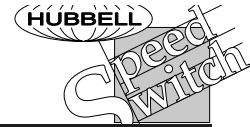

See page 19 for notes. See page 18 & 19 for illustrations.

Part Number	NEMA Type	Illus. No.	Dimensions										
			A	B	C	D	E	F	G	H	J	K	L
PRx-xxx-xx	1	1	7.78	1.47	0.34	1.16	4.31	0.50	1.25	0.88	0.63	2.63	1.50
-xxx-xxE	1	1	7.78	1.47	0.34	1.16	4.31	0.50	1.25	0.88	0.63	2.63	1.50
-xxx-xxF	1	12	7.78	0.84	5.47	0.50	0.19	3.00	0.97	0.88	0.63	2.63	2.75
-xxx-xxWP	3R	1	7.78	1.47	0.34	1.22	4.25	0.50	1.25	0.88	0.63	2.63	3.06
-xxx-xxWT	4	2	9.06	1.44	2.44	3.13	2.06	1.25	0.88	0.50	0.63	0.75	3.88
-xxx-xxXA	7, Class 1	2	9.06	1.44	2.44	3.13	2.06	1.25	0.88	0.50	0.63	0.75	3.88
-xxx-xxXBP	9, Class 2	2	9.06	1.44	2.44	3.13	2.06	1.25	0.88	0.50	0.63	0.75	3.88
-xxx-xxXB	10	2	9.06	1.44	2.44	3.13	2.06	1.25	0.88	0.50	0.63	0.75	3.88
-xxx-xxXC	10	2	9.06	1.44	2.44	3.13	2.06	1.25	0.88	0.50	0.63	0.75	3.88
-xxx-xxXD	10	2	9.06	1.44	2.44	3.13	2.06	1.25	0.88	0.50	0.63	0.75	3.88
-xxx-xxXE	10	2	9.06	1.44	2.44	3.13	2.06	1.25	0.88	0.50	0.63	0.75	3.88
PRS-038M-xx	1	1	7.78	1.47	0.34	1.16	4.31	0.50	1.25	0.88	0.63	2.63	1.50
-038M-xxE	1	1	7.78	1.47	0.34	1.16	4.31	0.50	1.25	0.88	0.63	2.63	1.50
-038M-xxF	1	12	7.78	0.84	5.47	0.50	0.19	3.00	0.97	0.88	0.63	2.63	2.75

2210-xxxxx4	4	3	7.06	4.13	2.19	1.38	1.56	1.31	1.31	0.63	0.63	1.78	2.00
-xxxxx4S	4	4	9.25	4.13	2.19	1.38	3.75	1.31	1.25	0.63	0.63	1.78	2.00
-xxxxx4SS	4	13	11.50	5.50	3.56	2.69	3.31	1.31	1.25	0.63	0.63	1.78	2.00
-xx2xx4M	4	3	7.06	4.13	2.19	1.38	1.56	1.31	1.31	0.63	0.63	1.78	2.00
-xx2xx4SM	4	4	9.25	4.13	2.19	1.38	3.75	1.31	1.25	0.63	0.63	1.78	2.00
-xx2xx4SSM	4	13	11.50	5.50	3.56	2.69	3.31	1.31	1.25	0.63	0.63	1.78	2.00
-xxxxx7	7, Class 1	6	6.63	1.13	2.25	2.81	1.38	6.19	1.25	0.63	0.63	2.69	3.06
-xxxxx7S	7, Class 1	7	10.00	1.13	2.25	5.19	1.38	8.56	1.25	0.63	0.63	2.69	3.06
-xxxxx7F	7, Class 1	11	8.95	1.06	0.50	0.19	1.00	1.38	1.19	0.63	0.63	2.69	3.06
-xx2xx7M	7, Class 1	6	6.63	1.13	2.25	2.81	1.38	6.19	1.25	0.63	0.63	2.69	3.06
-xx2xx7FM	7, Class 1	11	8.95	1.06	0.50	0.19	1.00	1.38	1.19	0.63	0.63	2.69	3.06
-xx2xx7SM	7, Class 1	7	10.00	1.13	2.25	5.19	1.38	8.56	1.25	0.63	0.63	2.69	3.06
-xxxxx9	9, Class 2	6	7.69	1.13	2.25	2.88	1.38	6.25	1.19	0.63	0.63	2.69	3.06
-xxxxx9S	9, Class 2	7	10.63	1.13	2.25	5.81	1.38	9.19	1.25	0.63	0.63	2.69	3.06
-xxxxx9F	9, Class 2	11	8.95	1.06	0.50	0.19	1.00	1.38	1.19	0.63	0.63	2.69	3.06
-xx2xx9M	9, Class 2	6	7.69	1.13	2.25	2.88	1.38	6.25	1.19	0.63	0.63	2.69	3.06
-xx2xx9FM	9, Class 2	11	8.95	1.06	0.50	0.19	1.00	1.38	1.19	0.63	0.63	2.69	3.06
-xx2xx9SM	9, Class 2	7	10.63	1.13	2.25	5.81	1.38	9.19	1.25	0.63	0.63	2.69	3.06
-xxxxx10	10	6	7.75	1.13	2.25	2.81	1.38	6.19	1.25	0.63	0.63	2.69	3.06
-xxxxx10S	10	7	10.13	1.13	2.25	5.19	1.38	8.56	1.25	0.63	0.63	2.69	3.06
-xxxxx13	3, 13	3	6.38	4.13	2.19	1.38	0.88	1.31	1.25	0.63	0.63	1.78	2.00
-xxxxx13F	3, 13	5	6.69	4.75	0.50	0.19	0.94	1.31	1.25	0.63	0.63	1.88	1.88
-xxxxx13FS	3, 13	5	9.13	7.19	0.88	0.19	0.88	1.31	1.19	0.63	0.63	1.88	1.88
-xxxxx13S	3, 13	4	8.63	4.13	2.19	1.38	3.13	1.31	1.25	0.63	0.63	1.78	2.00
-xxxxx13SS	3, 13	4	10.94	5.50	3.56	2.69	2.75	1.63	1.25	0.63	0.63	1.78	2.00
-xx2xx13M	3, 13	3	6.38	4.13	2.19	1.38	0.88	1.31	1.25	0.63	0.63	1.78	2.00
-xx2xx13FM	3, 13	5	6.69	4.75	0.50	0.19	0.94	1.31	1.25	0.63	0.63	1.88	1.88
-xx2xx13FSM	3, 13	5	9.13	7.19	0.88	0.19	0.88	1.31	1.19	0.63	0.63	1.88	1.88
-xx2xx13SM	3, 13	4	8.63	4.13	2.19	1.38	3.13	1.31	1.25	0.63	0.63	1.78	2.00
-xx2xx13SSM	3, 13	4	10.94	5.50	3.56	2.69	2.75	1.63	1.25	0.63	0.63	1.78	2.00

2220-xxxxx4	4	3	7.06	4.13	2.19	1.38	1.56	1.31	1.31	0.63	0.63	1.78	2.00
-xxxxx4S	4	4	9.25	4.13	2.19	1.38	3.75	1.31	1.25	0.63	0.63	1.78	2.00
-xxxxx4SS	4	13	11.50	5.50	3.56	2.69	3.31	1.31	1.25	0.63	0.63	1.78	2.00
-xxxxx7	7, Class 1	6	7.75	1.13	2.25	2.81	1.38	6.19	1.25	0.63	0.63	2.69	3.06
-xxxxx7S	7, Class 1	7	10.13	1.13	2.25	5.19	1.38	8.56	1.25	0.63	0.63	2.69	3.06
-xxxxx7F	7, Class 1	11	8.95	1.06	0.50	0.19	1.00	1.38	1.19	0.63	0.63	2.69	3.06
-xxxxx9	9, Class 2	6	7.81	1.13	2.25	2.88	1.38	6.25	1.19	0.63	0.63	2.69	3.06
-xxxxx9S	9, Class 2	7	10.75	1.13	2.25	5.81	1.38	9.19	1.25	0.63	0.63	2.69	3.06
-xxxxx9F	9, Class 2	11	8.95	1.06	0.50	0.19	1.00	1.38	1.19	0.63	0.63	2.69	3.06
-xxxxx13	3, 13	3	6.38	4.13	2.19	1.38	0.88	1.31	1.25	0.63	0.63	1.78	2.00
-xxxxx13F	3, 13	5	6.69	4.75	0.50	0.19	0.94	1.31	1.25	0.63	0.63	1.88	1.88
-xxxxx13FS	3, 13	5	9.13	7.19	0.88	0.19	0.88	1.31	1.19	0.63	0.63	1.88	1.88
-xxxxx13S	3, 13	4	8.63	4.13	2.19	1.38	3.13	1.31	1.25	0.63	0.63	1.78	2.00
-xxxxx13SS	3, 13	4	10.94	5.50	3.56	2.69	2.75	1.63	1.25	0.63	0.63	1.78	2.00


Series 2243	4	8	9.19	1.63	5.88	1.69	0.81	0.75	0.94	0.75	0.63	2.00	4.75
-------------	---	---	------	------	------	------	------	------	------	------	------	------	------

Series 2260	13	9	8.64	0.94	5.76	0.94	3.63	1.75	1.00	0.50	0.62	2.00	3.19
-------------	----	---	------	------	------	------	------	------	------	------	------	------	------

Series 2310	4X,13	10	3.93	0.68	1.96	1.28	1.06	1.10	—	—	—	—	—
-------------	-------	----	------	------	------	------	------	------	---	---	---	---	---

M	N	P	Dimensions							Res But	Sft Ext	Zrk Fit	Cond Con	Part Number	
			R	S	T	U	V	W	X						
—	8.75	$\frac{3}{16}'' \times \frac{3}{32}''$	2.50	2.75	5.25	—	1.56	—	—	—	—	—	—	—	PRx-xxx-xx
—	8.75	$\frac{3}{16}'' \times \frac{3}{32}''$	2.50	2.75	5.25	1.25	1.56	0.39	—	—	✓	—	—	—	-xxx-xxE
2.50	8.75	$\frac{3}{16}'' \times \frac{3}{32}''$	5.25	1.56	—	—	—	—	—	—	—	—	—	—	-xxx-xxF
7.13	8.75	$\frac{3}{16}'' \times \frac{3}{32}''$	2.50	2.75	5.25	—	1.56	—	—	—	—	—	—	—	-xxx-xxWP
9.25	0.50	$\frac{3}{16}'' \times \frac{3}{32}''$	4.21	3.02	6.28	1.56	1.56	—	—	—	—	—	—	—	-xxx-xxWT
9.25	0.50	$\frac{3}{16}'' \times \frac{3}{32}''$	4.19	3.00	6.25	1.56	1.69	—	—	—	—	—	—	—	-xxx-xxXA
9.25	0.50	$\frac{3}{16}'' \times \frac{3}{32}''$	4.19	3.00	6.25	1.56	1.69	—	—	—	—	—	—	—	-xxx-xxXBP
9.25	0.50	$\frac{3}{16}'' \times \frac{3}{32}''$	4.31	3.13	6.38	1.56	1.69	—	—	—	—	—	(1)	—	-xxx-xxXB
9.25	0.50	$\frac{3}{16}'' \times \frac{3}{32}''$	4.31	3.13	6.38	1.56	1.69	—	—	—	—	—	(2)	—	-xxx-xxXC
9.25	0.50	$\frac{3}{16}'' \times \frac{3}{32}''$	4.31	3.13	6.38	1.56	1.69	—	—	—	—	—	(3)	—	-xxx-xxXD
9.25	0.50	$\frac{3}{16}'' \times \frac{3}{32}''$	4.31	3.13	6.38	1.56	1.69	—	—	—	—	—	(4)	—	-xxx-xxXE
—	8.75	$\frac{3}{16}'' \times \frac{3}{32}''$	2.50	2.75	5.25	—	1.56	—	1.25	✓	—	—	—	—	PRS-038M-xx
—	8.75	$\frac{3}{16}'' \times \frac{3}{32}''$	2.50	2.75	5.25	1.25	1.56	0.39	1.25	✓	✓	—	—	—	-038M-xxE
2.50	8.75	$\frac{3}{16}'' \times \frac{3}{32}''$	5.25	1.66	1.13	—	—	—	—	—	—	—	—	—	-038M-xxF

1.25	4.44	#607 Wood.	0.69	—	—	—	—	—	—	—	—	—	—	—	2210-xxxxx4
1.25	4.44	#607 Wood.	0.69	—	—	—	—	—	—	—	—	—	—	—	-xxxxx4S
1.25	4.44	#607 Wood.	0.69	—	—	—	—	—	—	—	—	—	—	—	-xxxxx4SS
1.25	4.44	#607 Wood.	0.69	—	1.00										



Miscellaneous Information

Series 2200

Enclosure

The frame and end plate are cast iron, accurately machined and provided with sealed and permanently lubricated precision ball bearings in which the shaft rotates. The steel shaft is hardened and ground for extreme accuracy and carries the flyweight and contact actuation assembly. Lateral motion of the flyweights is transmitted to the contact actuation assembly through a sealed and permanently lubricated precision thrust ball bearing.

The heavy gauge sheet steel cover is provided with a gasket to make the enclosure semi-dust tight and oil resistant. NEMA Type 1 Gasketed. The cover is secured to the frame by means of two spring latches which keep the gasket under pressure at all times but yet the cover can be removed easily without the use of tools.

Contacts

The contact compartment provides several basic contact arrangements as required for various applications. Slow-action butt type bridging contacts for rapid speed change conditions or snap-action precision contacts for slow speed changes can be supplied.

Type PR-025 is a single circuit switch with normally open double break Butt Type contacts.

Type PR-026 is a two circuit switch with normally open double break Butt Type contacts in which one circuit is made in one direction and the other circuit is made in the opposite direction of shaft rotation. The two circuits can be isolated, if desired, by removing a short jumper.

Type PR-029 is a two circuit switch with normally open Butt Type contacts which are prevented from closing in spite of shaft rotation unless the motor, to which the switch is connected, is energized. This safety feature is accomplished by means of an integral

magnetic relay which mechanically latches the contacts in the open position until the magnetic coil, which is connected across two motor terminals, is energized and magnetically unlatches the contacts. This prevents the contacts from closing if the switch shaft or the drive to which it is connected is turned by hand.

Type PRS-025 is equipped with single pole double throw snap action contacts from which one normally open and one normally closed contact with common feed are available. At the point of contact actuation, the normally open contact closes and the normally closed contact opens on ascending speed and visa versa on descending speed.

Type PRD-025 is equipped with snap action contacts designed for use on DC control circuits since the contacts are equipped with a permanent magnet blowout and are provided with one normally open and one normally closed contact. The contacts of this switch are suitable for operation at 250 volts DC maximum.

Type NPR-029B is a two circuit centrifugal switch with two normally closed Butt Type contacts. In one direction of shaft rotation one contact opens while the other remains closed. In the other direction of shaft rotation the first contact remains closed while the second contact opens. This switch has been specially designed for use on high momentum drives to prevent plugging.

Series 2210

Enclosure

Standard Type C centrifugal switch housings are molded of tough fiber-glass reinforced polyester resin, for the flyweight compartment, and a cast aluminum housing for the contact compartment. The standard molded housings are resistant to most acid, alkali and salt compounds.

When flange-mounting is specified,

the flange and the flyweight section of the housing are precisely machined from a single aluminum casting.

NEMA Type 4 enclosures (watertight) for indoor/outdoor applications are furnished with a double shaft seal & grease fitting for lubrication and purging ensuring longer bearing life.

NEMA Type 7, 9 and 10 explosion proof enclosures are available also. These enclosures have precisely machined cast aluminum housings, either for surface or flange mounting.

Speed Adjustment

Speed points at which contacts operate are easily adjustable in the field within the standard operating ranges. Switches are factory set at minimum ascending speeds as listed. Other contact settings may be specified as an option. Each set of snap-action or slow-action contacts is independently adjustable from the rear while the switch is rotating. Also the speed setting of both sets of contacts can be changed at the same time by varying the tension on the main adjustment spring with the adjustment nut.

Contacts

The contact compartment provides several basic contact arrangements as required for various applications. Either slow-action butt-type bridging contacts for rapid speed-change conditions, or snap-action contacts, for slow speed changes, can be provided.

One set or two sets of normally open and/or normally closed single-throw contacts – each set independently adjustable – are available in the slow-action type. One set or two sets of normally open and normally closed single-pole, double-throw, snap-action switches are also available, with each set independently adjustable.

These two separate sets of contacts can be adjusted for operation at different speeds so that two separate operations can be controlled from one

speed sensing switch. Therefore, it is possible to perform separate functions at two different speeds. A directional sensing form of the switch employs slow-action butt-type bridging contacts in normally open position only.

Series 2220

Enclosure

The Type F fluid switch is supplied in a NEMA 13 industrial enclosure to resist lint, dust, seepage, external condensation and spraying of water, oil or coolant. For outdoor or indoor applications susceptible to splashing, or direct water spray, select a NEMA 4 enclosure. For hazardous locations containing explosive gas, NEMA 7, Class I, Group D should be used. NEMA 9, Class II, Group E, F, or G enclosures should be used in hazardous locations containing explosive dust. This design incorporates a double shaft seal to exclude dust particles from the switch interior.

This switch housing is a two part unit, fitted precisely together with tightly gasket joints. The front section encloses the fluid drag assembly and is molded of tough glass fiber reinforced polyester resin. The rear section, which encloses the contact-making compartment, is of cast aluminum. Both housings have ample cross-section to provide very rugged enclosures capable of withstanding shock impact or fracture due to severe service conditions. The aluminum housing is equipped with a grounding screw which provides a means of grounding the shaft to the conduit.

Speed Adjustment

Speed points at which contacts operate are easily adjustable in the field. Switches are factory-set at minimum rpm, but other contact settings may be specified as an option. Type F fluid switch contacts are easily and independently adjustable while running, to compensate for any contact operating variance due to ambient temperature conditions.

The contact compartment houses two single-pole double-throw snap-action switches. Both switches can be factory-assembled to operate in same direction, or one for each direction.

Series 2243

The output of the unit is provided by a single pole double throw plug-in type relay. The relay is located in the forward compartment. The relay contacts are factory wired to the terminal block in the rear compartment for easy customer connections.

On units designated for overspeed application, the relay de-energizes when set point is attained. On units designated for underspeed application, the relay de-energizes when set point is attained. The differential between ascending and descending set points is easily adjusted.

Type D Speed Responsive Switches are designed for reliable operation. In the event of component failure, the output relay reverts to a de-energized position. Long life and high reliability has been designed into these devices through the use of proven integrated circuits, transient voltage protection networks and high quality components. Silicon solid state components are used throughout to assure reliable operation over a wide temperature range.

To represent their durability, these switches are used successfully on automotive punch press applications.

Enclosure

The standard surface mounted enclosure is cast aluminum and is suitable for NEMA and CEMA Type 4.

The main compartment houses and shields the speed adjustment potentiometers, the "light chopping disc" and the chassis. The rear compartment contains the terminals for the input power and output relay connections. Covers for both compartments are provided with gaskets.

The Type D switch is available with either a 3/8" diameter shaft which has a flat for set screw securing, or a 3/16" diameter shaft which is supplied with a 3/16" square key. The shaft is supported by two large, lifetime-lubricated ball bearings for long life and low driving torque.

A grease fitting and double shaft seals are provided. Application of lubricant purges the area between the seals and prevents the penetration of water and abrasive dust.

Series 2260

The Type E Switch is a unitized device containing heavy duty industrial types of sub-modules required to provide consistent, precise, and repetitively accurate response.

The stainless steel input shaft is supported in the enclosure by two permanently sealed and lubricated ball bearings.

Speed Adjustment

The speed point at which the contacts operate is easily adjustable within the standard 3-300 rpm adjustment range. Clockwise rotation of the adjustment pot increases setting, counterclockwise rotation of the adjustment pot decreases setting.

All Type E units are factory set at the minimum ascending trip speed, 3 rpm, unless a specific setting is requested.

Series 2310

The Series 2310 speed responsive switches are available in both 3-wire low DC voltage and 2-wire series load activating AC voltage. Three (3) wire DC units operate either normally closed or normally open transistor outputs that can be either NPN "load sinking" or PNP "load sourcing" versions. All ver-

Miscellaneous Information

sions of these switches are available in a plastic threaded housing or in a plastic housing with a nickel-plated brass threaded sleeve.

Easily recalibrated for "home" position, the Series 2310 permits easy resetting to compensate for belt stretching or slipping on conveyor applications, and for compensatory adjustments on variable speed operations.

In order to sense slower speeds outside the listed ranges, multiple events or actuations per revolution must be used.

Select a mounting area, keeping the Free Zone requirements of non-shielded proximity sensors in mind (see below). The target must move laterally across the face of the speed switch. Actuating distance from the target to the speed switch face is shown in the adjacent figure and table. This information provides an estimated setup distance prior to actual starting.




The speed setting within a given sensor's range is adjustable with the 20-turn RPM adjustment potentiometer located behind the access screw. The ideal location of the speed switch is midway within this operating range.

Series 2310 Setpoint Selection

The Series 2310 speed adjustment ranges are shown in the graph below. The switch is settable on location with just a small screwdriver which is provided. The chart below left shows speed ranges based on single event measurements using a standard target. The speed range is directly related to the sensitivity of

the switch, lateral motion and the material being sampled.

The chart below right shows the effect of lateral motion to the sensing range. Several representative factors for different materials are shown on the bottom right.

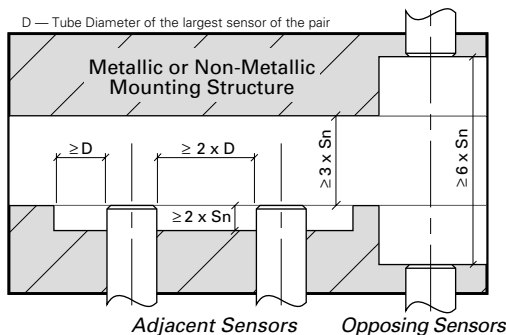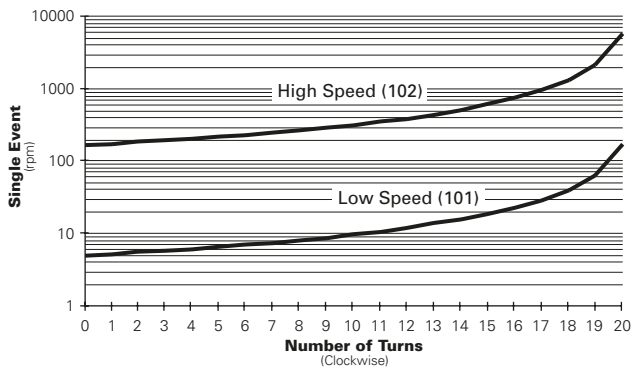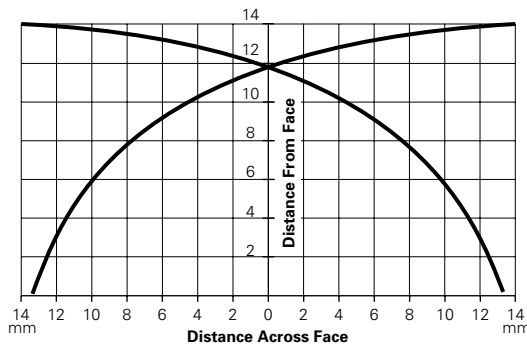

Material Reduction Factors

Based on a 30mm x 30mm x 1.5mm target

Steel	1.0
Stainless Steel	0.7 – 0.8
Aluminum	0.3 – 0.5
Brass	0.3 – 0.4
Copper	0.3 – 0.4



Hubbell Industrial Controls, Inc.

a subsidiary of Hubbell Incorporated
 50 Edwards Street, Madison, Ohio 44057
 Telephone (440) 428-1161 • FAX (440) 428-7635